
Energy Informatics

<https://proglang.informatik.uni-freiburg.de/teaching/energy-informatics/2018ws/>

Exercise Sheet 11 – TCP

2019-01-07

3. Exercise


Consider two senders A and B using TCP AIMD. For simplicity, let $x_A(t)$ be the data rate of A and $x_B(t)$ be the data rate of B .

If the sum of the data rates $x_A(t) + x_B(t)$ in a round is larger than 10, then


Otherwise we have

$$\begin{aligned} x_A(t+1) &= \frac{1}{2}x_A(t) \\ x_B(t+1) &= \frac{1}{2}x_B(t) \end{aligned}$$

$$\begin{aligned} x_A(t+1) &= x_A(t) + 1 \\ x_B(t+1) &= x_B(t) + 1 \end{aligned}$$

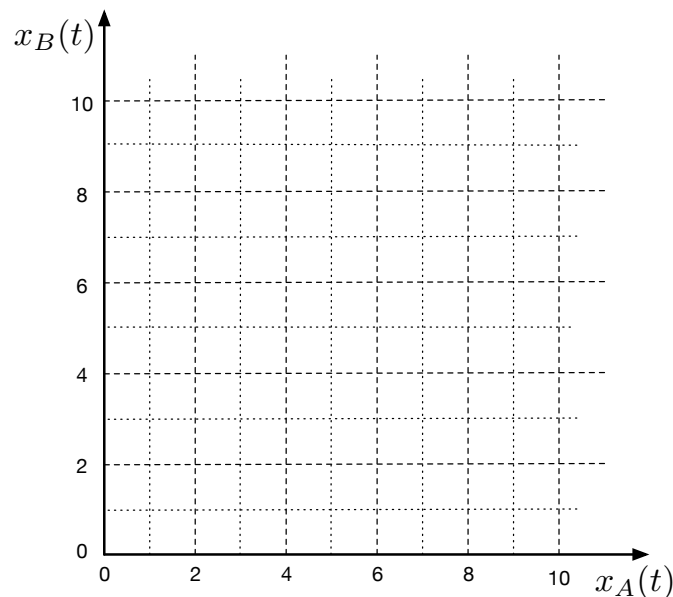

1. Add the fairness and efficiency lines to the diagrams.
2. Assume A starts in round 0 with $x_A(0) = 0$ and B at round 5, i.e. $x_B(t) = 0$ for all $t \leq 5$. Compute the first 15 values of A and B and add the behavior to the diagram above.
3. Now A leaves in round 15, such that $x_A(t) = 0$ for $t \geq 15$. Compute the next 10 rounds.
4. In a different scenario assume that A uses AIMD, but B has constant data rate 8, i.e. $x_B(t) = 8$. What happens?

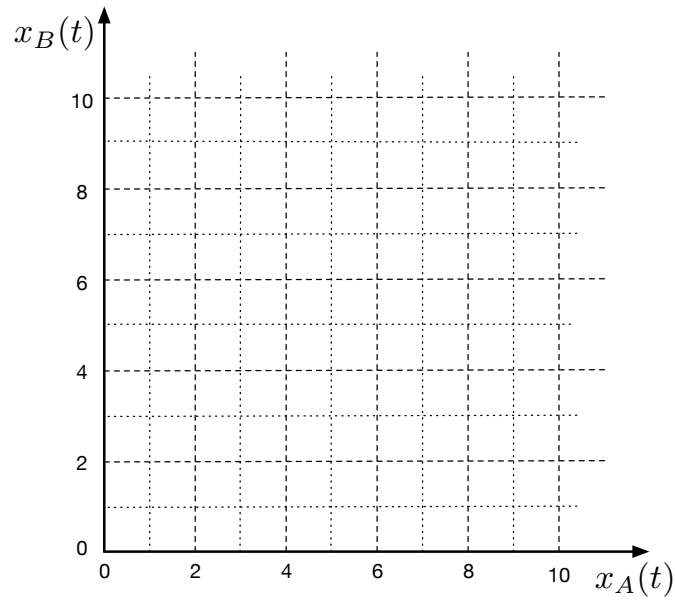

5. In the last scenario assume that A changes its behavior to AIAD (additive increase/additive decrease), i.e. replacing $x_A(t+1) = \frac{1}{2}x_A(t)$ by $x_A(t+1) = x_A(t) - 1$. Simulate 15 rounds where A and B start at the same time with bandwidth 0. 2 P

